

Nr kat.	PN	Wykonanie	Rura \varnothing d mm					
			20	25	32	40	50	63
6160	16	ZAK® 34						
		ZAK® 46						
		ZAK® 69						

Rura \varnothing d mm	Odejście	E	Masa kg
20	ZAK® 34	48	0,30
25		58	0,40
32		70	0,50
40		84	0,70
25	ZAK® 46	58	0,50
32		70	0,70
40		84	0,80
50		101	1,20
63	ZAK® 69	114	1,60
50		101	1,44
63		114	1,82

Cechy konstrukcyjne

- Zabezpieczona przed rozerwaniem
- Z demontowalnym pierścieniem stożkowym

Nr kat.	PN	Wykonanie	Rura \varnothing d mm			
			32	40	50	63
6170	16	ZAK® 34				
		ZAK® 46				

Rura \varnothing d mm	Odejście	L max.	L min.	Masa kg
32	ZAK® 34	127	71	1,05
50		149	82	1,85
32	ZAK® 46	154	71	1,10
40		147	77	1,50
50		149	82	1,70
63		201	104	2,70

Cechy konstrukcyjne


- Do zgrzewania

Nr kat.	PN	Wykonanie	Rura \varnothing d mm			
			32	40	50	63
6180	16	ZAK® 34				
		ZAK® 46				

Rura \varnothing d mm	Odejście	L	Masa kg
40	ZAK® 34	210	0,95
32	ZAK® 46	200	0,60
40		200	0,60
50		220	0,90
63		230	1,20


Złączka wtykowa ISO-ZAK®

Nr kat. 6160

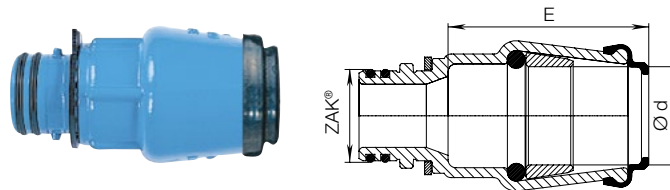

Złączka wtykowa ZAK® zabezpieczona przed rozerwaniem z demontowalnym pierścieniem stożkowym

Nr kat. 6170

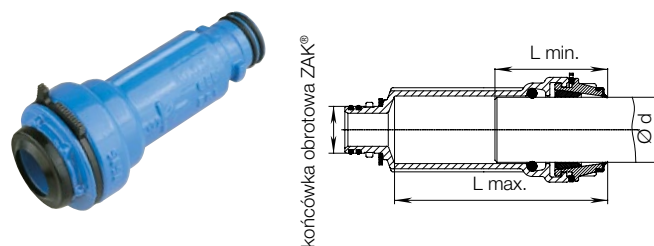

Złączka wtykowa PE-ZAK®

Nr kat. 6180

